

DESCRIPTION:

The SunSaver™ Solar Collector is manufactured in Chico, California. The collector is a specially developed, highly stabilized polyolefin and is of parallel, circular channel design. It is unglazed, un-insulated, and designed for low temperature applications such as swimming pool heating, heat pumps, aquaculture, hydroponics, and pre-heating.

DIMENSIONS:

	Collector Model Number		
	4 x 8, 2 x 8	4 x 10, 2 x 10	4 x 12, 2 x 12
Header Width	50-7/8", 26-7/8" (±1/8")	50-7/8", 26-7/8" (±1/8")	50-7/8", 26-7/8" (±1/8")
	1.29m, 0.68m (±3.2mm)	1.29m, 0.68m (±3.23mm)	1.29m, 0.68m (±3.23mm)
Panel Body Width	48", 24" (+1/4" - 0")	48", 24" (+1/4" - 0")	48", 24" (+1/4" - 0")
	1.22m, 0.61m (±6.4mm)	1.22m, 0.61m (±6.4mm)	1.22m, 0.61m (±6.4mm)
Overall Length	96" (±1/8")	120" (±1/8")	144" (±1/8")
	2.44m (±3.2mm)	3.05m (±3.2mm)	2.66m (±3.2mm)
Effective Area	32ft ² , 16ft ²	40ft ² , 20ft ²	48ft ² , 24ft ²
	2.97m ² , 1.47m ²	3.72m ² , 1.86m ²	4.46m ² , 2.23m ²
Weight (w/o fluid)	13.5lbs, 6.7lbs	15.9lbs, 7.9lbs	18.3lbs, 9.2lbs
	6.12kg, 3.04kg	7.21kg, 3.58kg	8.30kg, 4.17kg
Fluid Capacity	4.5gal, 2.3gal	5.3gal, 2.6gal	6.0gal, 3.0gal
	17.0L, 8.7L	20.1L, 9.8L	22.7L, 11.4L
Weight (w/ water)	51.1lbs, 25.6lbs	59.8lbs, 29.9lbs	68.5lbs, 34.2lbs
	23.2kg, 11.6kg	27.1kg, 13.6kg	31.1kg, 15.5kg

ROOF MOUNTING SPACE: Width = [Number of panels X 50-7/8" (1.29m)] + 24" (0.61m)
 Length = Panel length + 24" (0.61m)

RACK SPACE: Width = [Number of panels X 50-7/8" (1.29m)] + 2" (0.05m)
 Length = Panel length + 6" (0.15m)

FLOW: Maximum recommended flow = 0.20 gpm per ft² panel area (488 L/hr per m²)
 3.47 psi head loss (23.9 kPa)
 Minimum recommended flow = 0.05 gpm per ft² panel area (122 L/hr per m²)
 0.23 psi head loss (1.6 kPa)
 Recommended flow = 0.10 gpm per ft² panel area (244 L/hr per m²)
 0.87 psi head loss (6.0 kPa)


PRESSURE:	NORMAL OPERATING PRESSURE	MAXIMUM INTERMITTENT PRESSURE
	80°F (27°C)	0 to 30 psi (0 - 207 kPa)
212°F (100°C)	0 to 5 psi (0 - 34 kPa)	5 psi (34 kPa)
70°F (21°C)	Measured burst pressure of panel body = Over 300 psi (2069 kPa)	

TEMPERATURE: Normal operating temperature = 60°F to 90°F (16°C to 32°C)
 Maximum continuous operating temperature = 212°F (100°C)
 Maximum intermittent temperature (un-pressurized) = 250°F (121°C)
 Melt temperature = 338°F (170°C)


- CHEMICAL RESISTANCE:** Compatible with common collector fluids such as chlorinated or saline pool water.
- CORROSION:** Non-corrosive
- FREEZING:** The system should be drained before freezing conditions occur.
- WEATHERABILITY:** Weatherometer, accelerated outdoor exposure, and other extensive laboratory testing demonstrates long-term weatherability of SunSaver™ collectors (see warranty). Additionally, FAFCO's experience of 40+ years and over 2,000,000 collectors installed confirms that the proprietary stabilization and high mechanical strength results in negligible issues over the warranty period.
- ABSORPTIVITY:** 0.96
- EMISSIVITY:** 0.90
- TIME CONSTANT:** 138 seconds
- TESTED OUTPUT:** 1,800 Btu/ft²-day (5.7 kWh/m²-day) (Per SRCC OG100 Certification # 10001954)

PERFORMANCE GRAPHS:


INCIDENT ANGLE CHARACTERISTICS

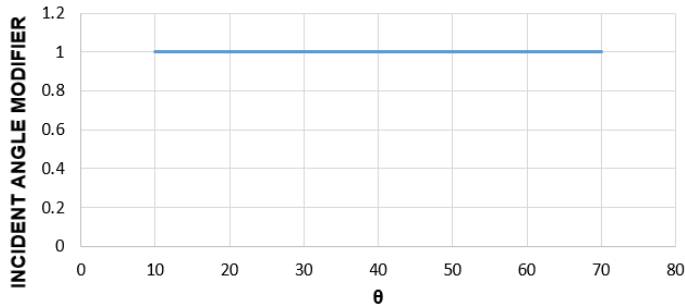


EFFICIENCY vs. FLOW
(for typical conditions)

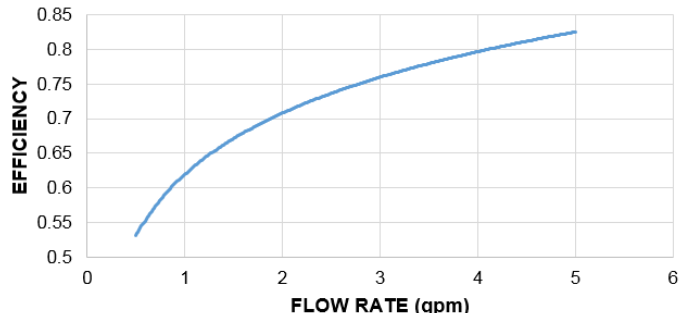

PRESSURE VS. FLOW

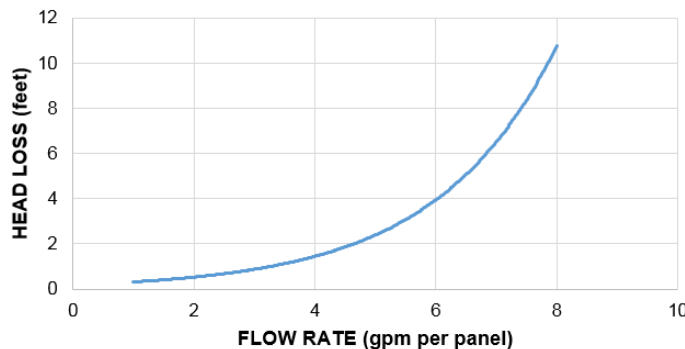

MEASURED EFFICIENCY
(5 gpm flow rate, 3mph wind speed)

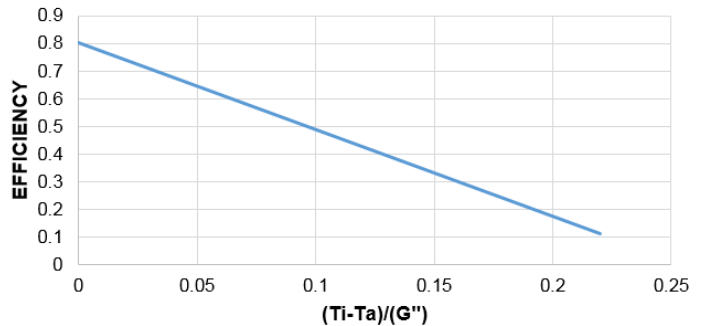

All specifications and dimensions set forth above are as estimated by FAFCO Inc., but are not intended to be precise and should not be relied upon as precise without independent verification. These estimated specifications and dimensions are subject to change without notice. Nothing contained herein is intended or should be construed to expand or extend FAFCO Inc.'s warranty, or establish any express or implied warranties of any nature, other than as contained in the Twelve Year Warranty Agreement. (FAFCO Inc. disclaims any other warranties and assumes no duty to provide notice if it becomes aware of any deficiencies in these estimates.) The reader accepts full responsibility for any use or application of these estimates and specifically understands and acknowledges the limited reliability of these estimates.

